

1.2A/16V Fully Integrated Linear Charger for 1 Cell Li-ion Battery

DESCRIPTION

ETA4052 is a single cell, fully integrated constant current (CC)/constant voltage (CV) Li-ion battery charger. Its compact package with minimum external components requirement makes the ETA4052 ideal for portable applications. No external sense resistor or blocking diode is necessary for the ETA4052. Build-in thermal feedback mechanism regulates the charge current to control the die temperature during high power operation or at elevated ambient temperature. The ETA4052 has a pre-charge function for trickle charging deeply discharged batteries. The fast charge current can be programmed by an external resistor. CV regulation mode is automatically enabled once the battery's charging curve reaches the constant voltage portion. The output current then decays and is finally terminated once the charge current drops to 1/10th of the programmed value. The ETA4052 keeps monitoring the battery voltage and enables a new charge cycle once the voltage drops by 120mV below the CV value.

ETA4052 is in a DFN3x3-10 package.


FEATURES

- ◆ 16V input standoff voltage
- ◆ 4.2V charge termination voltage
- ◆ 2.9V trickle charge threshold
- ◆ Charge current programmable, up to 1.2A
- ◆ 250nA BAT current when no charging
- ◆ Soft-start limits in-rush current
- ◆ DFN3x3-10

APPLICATIONS

- ◆ E-cigarette
- ◆ Toys
- ◆ Bluetooth applications
- ◆ Li-ion battery powered devices


TYPICAL APPLICATION

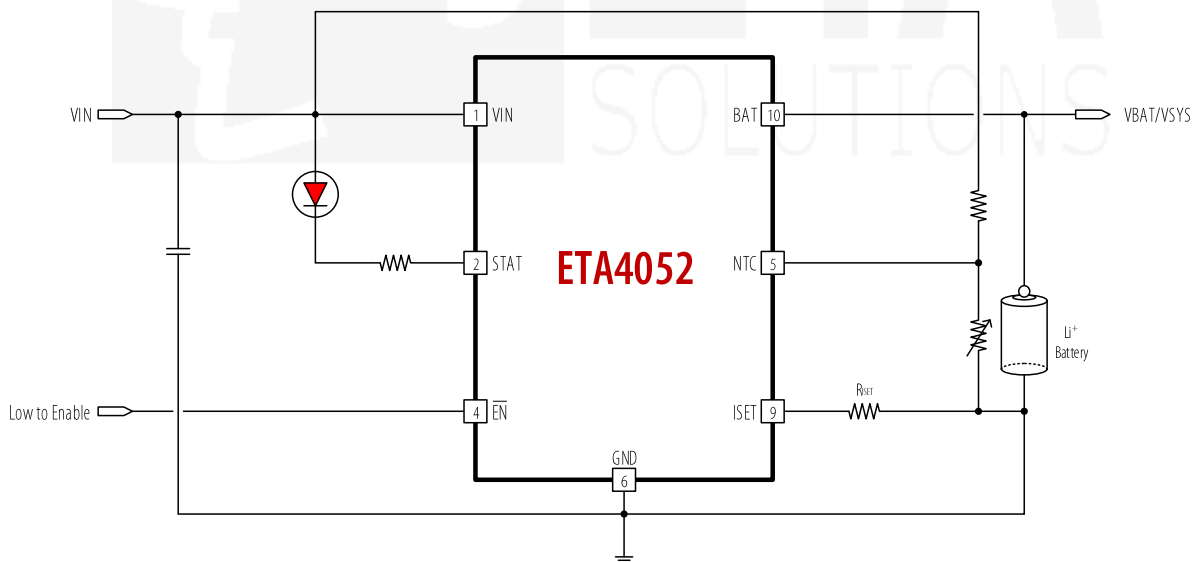

ORDERING INFORMATION

| PART No. | PACKAGE | TOP MARK | Pcs/Reel |
|------------|-----------|------------------|----------|
| ETA4052D3K | DFN3x3-10 | ETA4052 YWW2L | 5000 |

PIN CONFIGURATION

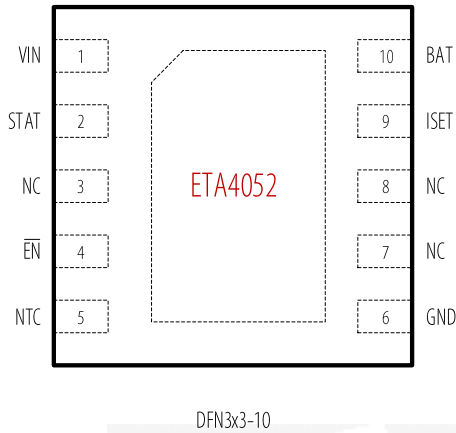

ABSOLUTE MAXIMUM RATINGS

(Note: Exceeding these limits may damage the device. Exposure to absolute maximum rating conditions for long periods may affect device reliability.)

| | |
|--|---------------------|
| VIN Voltage | -0.3V to 20V |
| ISET Voltage | -0.3V to 6V |
| All other pin Voltage..... | -0.3V to 16V |
| Operating Temperature Range..... | -40°C to 85°C |
| Storage Temperature Range | -55°C to 150°C |
| Thermal Resistance θ_{JC} θ_{JA} | |
| DFN3x3-10..... | 12.....50..... °C/W |
| Lead Temperature (Soldering, 10ssec) | 260°C |
| ESD HBM (Human Body Mode) | 2KV |
| ESD MM (Machine Mode) | 200V |

ELECTRICAL CHARACTERISTICS

($V_{IN} = 5V$, unless otherwise specified. Typical values are at $T_A = 25^\circ C$.)

| PARAMETER | CONDITIONS | MIN | TYP | MAX | UNITS |
|---------------------------------------|---|------|------|------|------------|
| Input Standoff Voltage | | 16 | | | V |
| Input Over-Voltage Protection Voltage | VIN rising, hys=0.3V | 6.5 | 7 | 7.4 | V |
| Input Voltage Range for Charging | | 4.25 | | 6 | V |
| Input Supply Current | Charge Mode | | 300 | 2000 | μA |
| | Standby Mode (Charge Terminated) | | 65 | 100 | μA |
| | Shutdown Mode (ISET Not Connected, EN=0, VIN<VBAT, or VIN<VULO) | | 25 | 50 | μA |
| Regulated Output (Float) Voltage | Rset = 15K, IBAT = 40mA | 4.16 | 4.2 | 4.24 | V |
| BAT Pin Current | Rset = 3.3K, Current Mode | 435 | 500 | 565 | mA |
| | Rset = 1.65K, Current Mode | 850 | 1000 | 1150 | mA |
| | Standby Mode, VBAT = 4.2V | | 2 | 3 | μA |
| | Shutdown Mode, ISET Not Connected | 0 | 0.25 | 0.35 | μA |
| | Sleep Mode, VIN = 0V | 0 | 0.25 | 0.35 | μA |
| Trickle Charge Current | VBAT < VTRIKL, Rset = 3.3K | 40 | 100 | 200 | mA |
| Trickle Charge Threshold Voltage | VBAT Rising | 2.75 | 2.93 | 3.1 | V |
| Trickle Charge Hysteresis Voltage | | 100 | 130 | 165 | mV |
| VIN Under-voltage Lockout Threshold | From VIN Low to High | 3.05 | 3.35 | 3.6 | V |
| VIN Under-voltage Lockout Hysteresis | | 0.4 | 0.55 | 0.65 | V |
| EN Pull-Down Resistor | | | 800 | | k Ω |
| Disable Charger | EN Pin Rising | 1.6 | | | V |
| Enable Charger | EN Pin Falling | | | 0.6 | V |
| VIN-VBAT Lockout Threshold Voltage | VIN from Low to High | 50 | 100 | 140 | mV |
| | VIN from High to Low | 5 | 30 | | mV |

| PARAMETER | CONDITIONS | MIN | TYP | MAX | UNITS |
|---|-------------------------------|-------|------|-------|-------|
| C/10 Termination Current Threshold | | 0.085 | 0.1 | 0.115 | mA/mA |
| ISET Pin Voltage | Current Mode, VBAT=4V | | 1 | | V |
| STAT Pin Weak Pull-Down Current | V_STAT = 5V | | 0.1 | | μA |
| STAT Pin Output Low Voltage | I_STAT = 5mA | | 0.35 | 0.6 | V |
| Recharge BAT Threshold Voltage | VFLOAT - VRECHRG | 90 | 120 | 150 | mV |
| Junction Temperature in Constant Temperature Mode | | | 120 | | °C |
| Power FET "ON" Resistance (Between VCC and BAT) | | | 0.5 | | ohm |
| Soft-Start Time | IBAT = 0 to IBAT = 1000V/RSET | | 100 | | μs |
| Termination Comparator Filter Time | IBAT Falling Below ICHG/10 | 400 | 1000 | 2500 | μs |
| ISET Pin Pull-Up Current | | | 1 | | μA |
| NTC Threshold, Cold | Charger Suspended | | 42 | 44 | % VIN |
| NTC Threshold, Hot | Charger Suspended | 5.5 | 6 | | % VIN |
| NTC Threshold Hysteresis | | | 1 | | % VIN |
| NTC Disable Threshold | Tie NTC to GND | | | | |
| NTC Input Leakage | | | 0 | 1 | μA |

PIN DESCRIPTION

| PIN# | NAME | DESCRIPTION |
|---------|------------------------|--|
| 1 | VIN | Positive Input Supply. Needs to be bypassed with at least a 4.7μF capacitor. |
| 2 | STAT | Open-Drain Output for In Charging flag, The STAT pin outputs low when the battery is in charging. Upon the completion of the charge cycle, it becomes high-impedence. |
| 3, 7, 8 | NC | No Connect. |
| 4 | $\overline{\text{EN}}$ | Charger IC Enable. An input "Low" signal at this pin or if the pin is floating will enable the IC. |
| 5 | NTC | Battery Temperature Monitoring input pin. It sets the valid temperature operating range for both battery charging and discharging. |
| 6 | GND | Ground. |
| 9 | ISET | Program, Monitor the charge current and Shutdown. This pin set to 1V in constant-current mode. The charge current is programmed by connecting a 1% resistor (Rset), between ISET, to GND pin. The charge current can be calculated using the following formula: $I_{\text{BAT}} = \frac{1.65}{R_{\text{set}}} \times 1000 \text{ (A)}$ The ISET pin can also be used to switch the charger to shutdown mode by disconnecting the program resistor from ground. |
| 10 | BAT | Charge Current Output. This pin provides charge current to the battery and regulates the final float voltage to 4.2V which is set by an internal precision resistor divider. |

FUNCTIONAL DESCRIPTIONS

The ETA4052 is a single cell, fully integrated constant current (CC)/constant voltage (CV) Li-ion battery charger. It can deliver up to 1200mA of charge current with a final float voltage accuracy of 1%. The ETA4052 has a build-in thermal regulation circuitry that ensures its safe operation. No blocking diode or external current sense resistor is required; hence reduce the external components for a basic charger circuit to two. The ETA4052 is also capable of operating from a USB power source.

Normal Charge Cycle

The ETA4052 initiates a charge cycle once the voltage at the VIN pin rises above the UVLO threshold level. A 1% precision resistor needs to be connected from the ISET pin to ground. If the voltage at the BAT pin is less than 2.9V, the charger enters trickle charge mode. In this mode, the charge current is reduced to nearly 2/10 the programmed value until the battery voltage is raised to a safe level for full current charging.

The charger switches to constant-current mode as the BAT pin voltage rises above 2.9V, the charge current is thus resumed to full programmed value. When the final float voltage (4.2V) is reached, the ETA4052 enters constant-voltage mode and the charge current begins to decrease until it drops to 1/10 of the preset value and ends the charge cycle.

Programming Charge Current

The charge current is programmable by setting the value of a precision resistor connected from the ISET pin to ground. The charge current is 1650 times of the current out of the ISET pin. The charge current out of the BAT pin can be determined at any time by monitoring the ISET pin voltage using the following equation:

$$I_{BAT} = \frac{1.65}{R_{set}} \times 1000 \text{ (A)}$$

Charge Termination

The ETA4052 keeps monitoring the ISET pin during the charging process. It terminates the charge cycle when the charge current falls to 1/10 the programmed value after the final float voltage is reached. When the ISET pin voltage falls below 100mV for longer than tTERM (typically 1ms), charging is terminated. The charge current is latched off and the ETA4052 enters standby mode, where the input supply current drops to 200µA. (Note: C/10 termination is disabled in trickle charging and thermal limiting modes).

During charging, the transient response of the circuit can cause the ISET pin to fall below 100mV temporarily before the battery is fully charged, thus can cause a premature termination of the charge cycle. A 1ms filter time on the termination comparator can prevent this from happening. Once the average charge current drops below 1/10 the programmed value, the ETA4052 terminates the charge cycle and ceases to provide any current through the BAT pin. In this state, all loads on the BAT pin must be supplied by the battery.

The ETA4052 constantly monitors the BAT pin voltage in standby mode and resume another charge cycle if this voltage drops below the recharge threshold. User can also manually restart a charge cycle in standby mode either by removing and then reapplied the input voltage or restart the charger using the ISET pin.

Charge Status Indicator (STAT pin)

STAT is the pin to pull low during IN CHARGING status and become high impedance in CHARGING FINISHED status.

High Temperature Fold-back

Build-in feedback circuitry mechanism can reduce the value of the programmed charge current once the die temperature tends to rise above 120°C, hence prevents the temperature from further increase and ensure device safe operation.

Under-voltage Lockout (UVLO)

Build-in under-voltage lockout circuit monitors the input voltage and keeps the charger in shutdown mode until VIN rises above the under-voltage lockout threshold. The UVLO circuit has a built-in hysteresis of 500mV. Furthermore, to protect against reverse current in the power MOSFET, the UVLO circuit keeps the charger in shutdown mode if VIN falls to within 30mV of the battery voltage. If the UVLO comparator is tripped, the charger will not come out of shutdown mode until VIN rises 100mV above the battery voltage.

Manual Shutdown

There are two methods can disable the IC charger:

1. Driver the EN pin to high.
2. Floating the ISET pin by removing the resistor from ISET pin to ground.

Once one of above conditions happen can put the device in shutdown mode. The battery drain current is thus reduced to 250nA and the supply current to <math><50\mu\text{A}</math>. Reconnecting the resistor back or driver EN pin low or floating EN will restart a new charge cycle.

Automatic Recharge

After the termination of the charge cycle, the ETA4052 constantly monitors the BAT pin voltage and starts a new charge cycle when the battery voltage falls below 4.08V, keeping the battery at fully charged condition. ISET pin output enters a strong pull-down state during recharge cycles.


Battery Temperature Monitoring

ETA4052 continuously monitors temperature by measuring the voltage of NTC pin. A negative or positive temperature coefficient thermistor and an external voltage divider typically develop this voltage. ETA4052 compares this voltage against its internal 42%VIN and 6%VIN thresholds to determine if charging is allowed. The temperature sensing circuit is immune to any fluctuation in VIN, since both the external voltage divider and the internal thresholds 42%VIN and 6%VIN are referenced to VIN. If the NTC pin is connected to GND will disable the temperature-sensing feature.

ETA4052 has a built-in NTC resistance window comparator. When between VIN and NTC pin is connected a 500kΩ resistor, the ETA4052 will cease charging if $R_{\text{NTC}} < 32.3\text{k}\Omega$ or $R_{\text{NTC}} > 376.6\text{k}\Omega$. This represents a valid charging temperature range of 0°C to 50°C for the TH11-4H104F NTC resistor.

PACKAGE OUTLINE

Package: DFN3x3-10

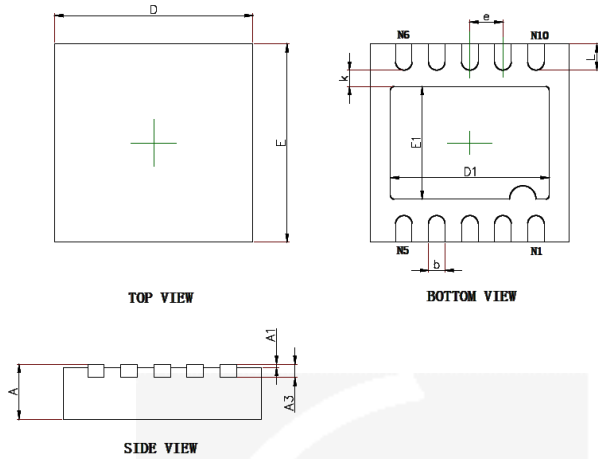

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Min. | Max. | Min. | Max. |
| A | 0.700 | 0.800 | 0.028 | 0.031 |
| A1 | 0.000 | 0.050 | 0.000 | 0.002 |
| A3 | 0.203REF. | | 0.008REF. | |
| D | 2.924 | 3.076 | 0.115 | 0.121 |
| E | 2.924 | 3.076 | 0.115 | 0.121 |
| D1 | 2.300 | 2.500 | 0.091 | 0.098 |
| E1 | 1.600 | 1.800 | 0.063 | 0.071 |
| k | 0.200MIN. | | 0.008MIN. | |
| b | 0.200 | 0.300 | 0.008 | 0.012 |
| e | 0.500TYP. | | 0.020TYP. | |
| L | 0.324 | 0.476 | 0.013 | 0.019 |